



STRONG CONNECTIONS

OTS Emergency towing system

Complete Emergency Towing Systems (ETS) for vessels 20-50.000 DWT and over 50.000 DWT. The kits are in full compliance with resolution MSC.35(63) of the 1994 SOLAS convention and the amendments in MSC.256(84).

Dextron®12 Plus towing line is a light rope with high strength and good visibility. The towing line and optional bridle legs are protected with the patented OTS Protective Jacket™. The complete system is easy accessible in a solid plastic container with top cover closed with straps.

The kits are delivered in three different types according to vessel equipment number*. In addition to the standard ETS types, the kit can be customized to meet your specific demands.



Contents


- Emergency tow line
- Light buoy/Floating buoy
- Pick up line (Dextron® 12 Plus)
- Plastic container with top

Optional

- Stretcher
- Bridle legs
- Reflective Protective Jacket
- PLT (Pneumatic Line Throwers)
- Pick up equipment

Advantages

- Low weight
- High strength
- Patented OTS Protective Jacket™ against abrasion
- Floating
- No maintenance
- Fast and easy rigging

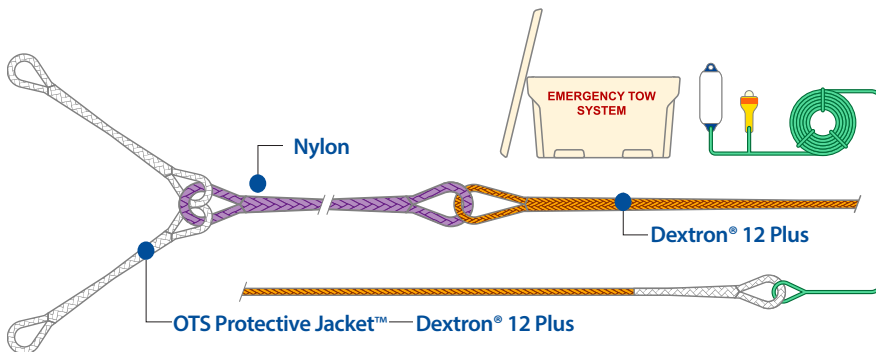

STANDARD DIMENSIONS

Dextron® 12 Plus (Dyneema® SK78)

Type / Product No	ETS type	Dextron® Messenger Line	Dextron® Towline	ISO 2307 strength	Assembly
1 / 013301	under 20.000 DWT	10mm, 122m	36mm, 76m	114 MT	92x71x71 cm
2 / 013302	20.000 – 50.000 DWT	16mm, 122m	56mm, 76m	250 MT	123x103x75 cm
3 / 013303	above 50.000 DWT	16mm, 122m	80mm, 92m	457 MT	147x118x89 cm

All kits meet the requirements of IMO guidelines – SOLAS regulation 11-1/3-4, 11-1/3-8, MSC.1/Circ.1255 and MSC/Circ.1175.



Dextron® rope made with Dyneema®
The world's strongest fiber™

